


DATA SHEET - CLAMSHELL BUCKET

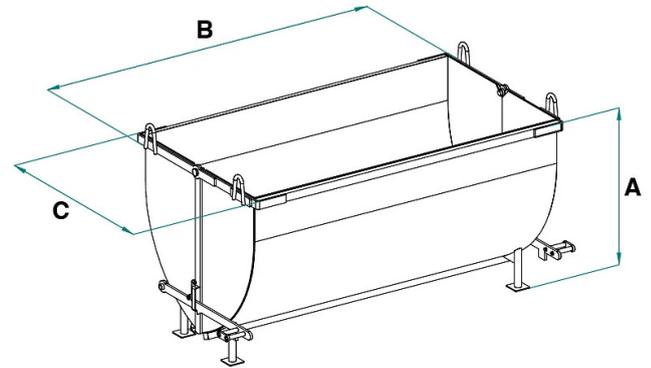

| Code | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) | | |
|--------|---------------|--------------|-------------|-----------------|------|------|
| | | | | A | B | C |
| A-50S | 1000 | 500 | 110 | 824 | 1044 | 953 |
| A-80S | 1600 | 800 | 175 | 1043 | 1086 | 1226 |
| A-99S | 2000 | 1000 | 190 | 1043 | 1386 | 1226 |
| A-150S | 3000 | 1500 | 265 | 1044 | 1792 | 1226 |
| A-200S | 4000 | 2000 | 405 | 1155 | 2198 | 1234 |
| A-300S | 6000 | 3000 | 610 | 1328 | 2210 | 1550 |

DATA SHEET - CLAMSHELL BUCKET

Self dumping bins



Clamshell bucket

Clamshell bucket for aggregates and debris with bottom opening by lever

This debris bucket, known as the A-S model, is distinguished by its continuous bottom opening, giving it remarkable versatility in handling various types of materials, especially during excavation filling operations. It features a manual lever opening on both sides and four hooks positioned at the corners to ensure stable and secure lifting. The main advantages of this bucket include: **Robustness:** Constructed with durable materials, the debris bucket is designed to withstand the toughest challenges of construction sites. Its solid frame and resilient structure ensure long-lasting durability without compromise. **Exceptional Capacity:** This bucket can handle significant loads of debris and waste, reducing the number of loads and unloads needed for disposal, thus improving operational efficiency. **Versatility:** It is suitable for a wide range of applications, including site cleanup, waste management, and the transport of scrap materials. **Safety:** This bucket is designed with a focus on site safety, helping to reduce the risk of accidents during the lifting and transport of debris. All our buckets are built and tested according to UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204 standards and come with a metal ID plate, a certificate of conformity, and a user and maintenance manual. All our products are covered by a one-year warranty (European Directive).

Application sectors

 Construction