


## DATA SHEET - DROP BOTTOM OPENING SKIP 1 DOOR

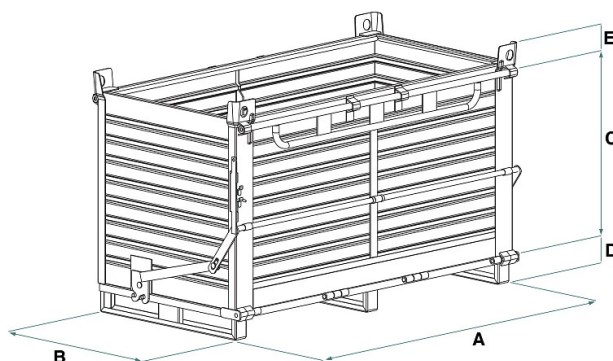

| Code      | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) |      |      |     |     |
|-----------|---------------|--------------|-------------|-----------------|------|------|-----|-----|
|           |               |              |             | A               | B    | C    | D   | E   |
| CL-FAU50  | 2000          | 500          | 115         | 1000            | 800  | 650  | 150 | 110 |
| CL-FAU80  | 2000          | 800          | 135         | 1000            | 800  | 1000 | 150 | 110 |
| CL-FAU99  | 2000          | 1000         | 150         | 1000            | 800  | 1250 | 150 | 110 |
| CL-FAU100 | 2000          | 1000         | 200         | 1500            | 1000 | 650  | 150 | 110 |
| CL-FAU150 | 2000          | 1500         | 240         | 1500            | 1000 | 1000 | 150 | 110 |
| CL-FAU200 | 2000          | 2000         | 340         | 2000            | 1000 | 1000 | 150 | 110 |

## DATA SHEET - DROP BOTTOM OPENING SKIP 1 DOOR

---

### Storage and handling equipment



## Drop bottom opening skip 1 door

### Sheet metal container with single hinged bottom

The sheet metal container with single hinged bottom represents a highly effective sheet metal solution for managing waste and scrap. This device features a unique bottom that significantly simplifies the collection, handling, and unloading of long or bulky materials. One of the most advantageous features of this container is its emptying system, designed to be simple and safe. An operation facilitated by a tipping lever that can be operated directly by the operator without needing to dismount the forklift. This operation can be easily performed with the aid of a rope. This lever-operated emptying system not only simplifies the process but, above all, ensures greater safety for operators and minimizes the risk of workplace accidents. Additionally, for an extra level of safety, the open-bottom container is equipped with a safety chain that prevents the container from accidentally slipping off the forklift tines and falling dangerously to the ground. The production of this open-bottom container is subjected to stringent quality standards to ensure a reliable and durable product. This product is built and tested according to UNI EN ISO 12100, UNI EN 10027-1, and UNI EN 10204 standards and is issued with the appropriate metal ID plate and certificate of conformity. All our products are covered by a one-year warranty (European Directive).

### Application sectors

 Industry