


## DATA SHEET - CONCRETE BUCKET WITH RUBBER HOSE AND SIDE DISCHARGE

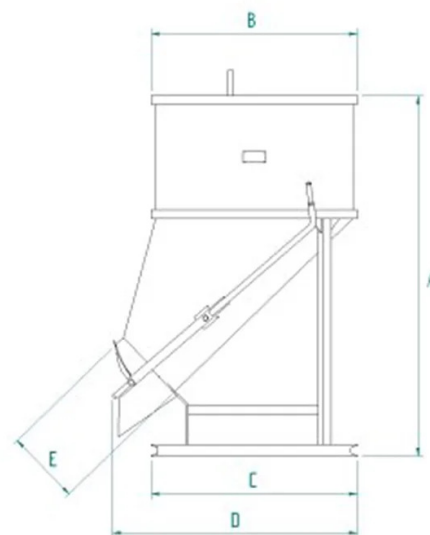

| Code    | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) |      |      |      |     |
|---------|---------------|--------------|-------------|-----------------|------|------|------|-----|
|         |               |              |             | A               | B    | C    | D    | E   |
| BF-50T  | 1300          | 500          | 110         | 1510            | 935  | 935  | 1130 | 200 |
| BF-75T  | 1950          | 750          | 210         | 1781            | 1170 | 1170 | 1415 | 200 |
| BF-99T  | 2600          | 1000         | 235         | 2041            | 1170 | 1170 | 1415 | 200 |
| BF-150T | 3900          | 1500         | 430         | 1990            | 1492 | 1408 | 1630 | 200 |
| BF-200T | 5200          | 2000         | 460         | 2290            | 1492 | 1408 | 1630 | 200 |

## DATA SHEET - CONCRETE BUCKET WITH RUBBER HOSE AND SIDE DISCHARGE

### Concrete buckets



## Concrete bucket with rubber hose and side discharge

### Concrete bucket with side discharge and rubber hose

We are pleased to introduce the BF-T model concrete bucket, designed to offer reliable and versatile performance in your construction projects on site. Characterized by a side discharge, a guillotine valve with lever-operated opening, this model provides an excellent solution for transporting and pouring concrete with a construction crane. The bucket is lifted with a three-legs chain sling and includes a 2-meter-long, 200 mm diameter tube, which can also be provided in different sizes and lengths upon request, to fit the specific needs of your project. The BF-T model can be customized with a forkable base to allow lifting with a forklift or telescopic handler, offering unparalleled operational flexibility (see also the BF-ST model). Available in various sizes and capacities, as detailed in the specifications table, this item can be adapted to the specific requirements of your project. All our buckets are built and tested in accordance with stringent UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204 standards. Each product is accompanied by a metal ID plate, conformity certificate, and operation and maintenance manual to ensure proper use over time. Additionally, all our products are covered by a one-year warranty, in compliance with the European Directive.

### Application sectors

 Construction