


DATA SHEET - SELF BALANCING CRANE FORK WITH ADJUSTABLE TINES

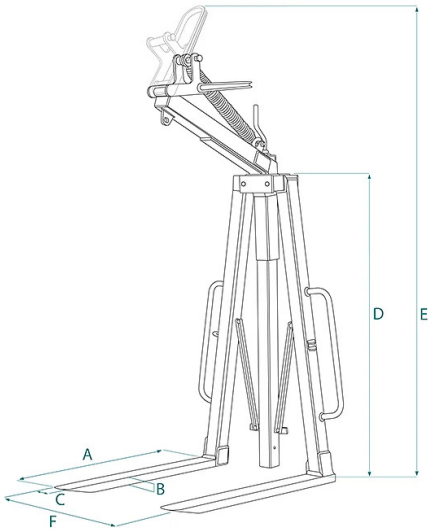

Code	Capacity (kg)	Weight (kg)	Dimensions (mm)					
			A	B	C	D	E	F
MBA-06	600	95	1000	25	80	1300	2400	400-1600
MBA-10	1000	100	1000	25	90	1300	2400	400-1600
MBA-15	1500	115	1000	30	90	1300	2400	400-1600
MBA-20	2000	140	1000	35	100	1300	2400	400-1600
MBA-25	2500	165	1000	40	90	1300	2400	400-1600
MBA-30	3000	175	1000	35	120	1300	2400	400-1600

DATA SHEET - SELF BALANCING CRANE FORK WITH ADJUSTABLE TINES

Crane forks



Self balancing crane fork with adjustable tines

Crane fork with automatic spring balancing

The crane fork features a practical adjustment up to the desired opening and a functional and manageable closure through a specific handwheel. The springs ensure automatic load balancing and optimal stability during lifting operations. The MBA model has a useful load height of 1300 mm, large handles to facilitate the orientation of the crane fork during pallet insertion and removal, and thin tines for greater maneuverability. All our crane forks are equipped with a strap and ratchet in compliance with EN13155 regulations, ensuring safety and compliance with European lifting standards. Additionally, they are equipped with 2 welded perforated plates, which serve as a provision for the installation of the safety net. The forks are built and tested in accordance with UNI EN ISO 12100, UNI EN 13854, ISO 8686, and UNI EN 10204 standards. They are supplied with a specific metal ID plate, certificate of conformity, and user and maintenance manual. All our products are covered by a one-year warranty in compliance with the European Directive.

Application sectors

 Construction  Lifting