


**DATA SHEET - LAYDOWN CONCRETE COLUMN SKIP WITH RUBBER HOSE AND LATERAL LIFTING POINTS**

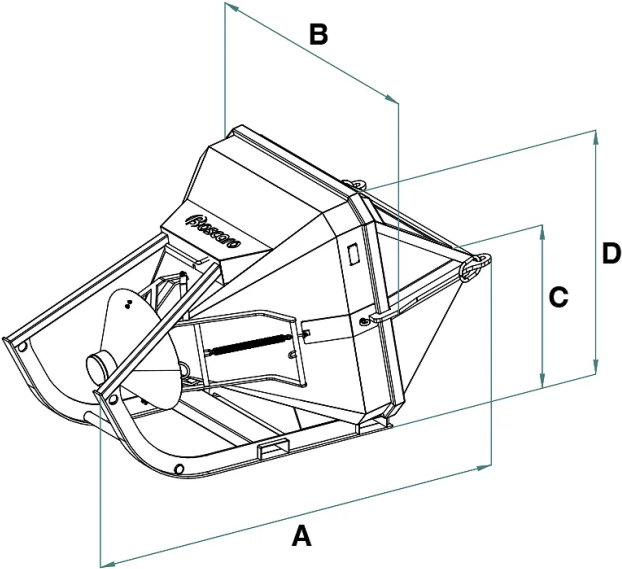

| Code    | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) |      |      |      |
|---------|---------------|--------------|-------------|-----------------|------|------|------|
|         |               |              |             | A               | B    | C    | D    |
| BC-40A  | 1040          | 400          | 240         | 1950            | 1354 | 735  | 1146 |
| BC-50A  | 1300          | 500          | 275         | 2048            | 1354 | 753  | 1164 |
| BC-60A  | 1560          | 600          | 285         | 2146            | 1354 | 771  | 1181 |
| BC-80A  | 2080          | 800          | 340         | 2380            | 1480 | 931  | 1514 |
| BC-99A  | 2600          | 1000         | 385         | 2475            | 1480 | 931  | 1514 |
| BC-125A | 3250          | 1250         | 410         | 2630            | 1679 | 1147 | 1680 |
| BC-150A | 3900          | 1500         | 545         | 2783            | 1679 | 1147 | 1680 |
| BC-175A | 4550          | 1750         | 610         | 2887            | 1681 | 1183 | 1716 |
| BC-200A | 5200          | 2000         | 655         | 2990            | 1681 | 1183 | 1716 |
| BC-250A | 6500          | 2500         | 935         | 3185            | 1906 | 1343 | 1898 |
| BC-300A | 7800          | 3000         | 1030        | 3377            | 1906 | 1378 | 1933 |

## DATA SHEET - LAYDOWN CONCRETE COLUMN SKIP WITH RUBBER HOSE AND LATERAL LIFTING POINTS

---

### Concrete buckets



## Laydown concrete column skip with rubber hose and lateral lifting points

### Laydown concrete bucket with rubber hose, lever opening, and lifting rings

The concrete bucket, with lever-operated opening and rubber hose, is the ideal choice for precise and reliable pours on the most demanding construction sites and for intensive use. Its design, tailored to the needs of the most challenging sites, makes it indispensable for pouring large quantities of concrete with extreme precision into formwork, pillars, or slabs, avoiding potential structural issues from casting errors. The bucket is equipped with a guillotine valve operated by a lever. A spring allows for automatic closure of the discharge, while a rope allows the bucket to be opened even at height. The bucket is designed to be lifted with a two-legs chain sling, thanks to side-welded lifting points, which replace the bale arm present in the BC model. The two-meter-long rubber hose, with a diameter of 200 mm, ensures a controlled and precise flow of concrete during pouring. A unique feature of these buckets is the horizontal ground loading method, which makes the bucket, even if of large capacity, very low at the edge, allowing the concrete mixer to fill it without any impediment. Once filled, the bucket is safely lifted by the crane, automatically repositioning itself vertically and becoming ready for new use, thus ensuring high efficiency and ease of use on site. All our buckets are built and tested in accordance with the strict standards UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204. Each product comes with a metal ID plate, certificate of conformity, and user and maintenance manual to ensure proper use over time. Additionally, all our products are covered by a one-year warranty, in compliance with the European Directive.

### Application sectors

 Construction