


DATA SHEET - FORKLIFT TIPPING SKIP

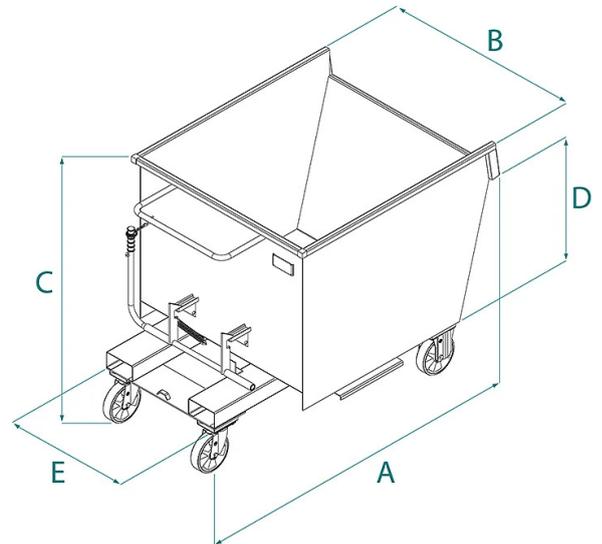

| Code | Capacity (kg) | Capacity (L) | Weight (kg) | Dimensions (mm) | | | | |
|--------|---------------|--------------|-------------|-----------------|------|------|------|-----|
| | | | | A | B | C | D | E |
| BB-30 | 600 | 300 | 80 | 1345 | 860 | 982 | 555 | 585 |
| BB-40 | 600 | 400 | 90 | 1348 | 860 | 990 | 749 | 580 |
| BB-50 | 1000 | 500 | 100 | 1480 | 980 | 925 | 835 | 660 |
| BB-80 | 1350 | 800 | 155 | 1515 | 1110 | 1075 | 975 | 700 |
| BB-99 | 1500 | 1000 | 190 | 1640 | 1110 | 1195 | 1045 | 700 |
| BB-135 | 1500 | 1350 | 195 | 1610 | 1345 | 1195 | 1045 | 800 |
| BB-160 | 1500 | 1600 | 215 | 1610 | 1600 | 1195 | 1045 | 800 |
| BB-200 | 1500 | 2000 | 255 | 1620 | 2100 | 1195 | 1148 | 800 |

DATA SHEET - FORKLIFT TIPPING SKIP

Warehousing logistics



Forklift tipping skip

Tipping skip with forklift pockets and wheels

The BB model represents the optimal solution for easy and safe collection, transport, and discharge of industrial waste, chips, scraps, and metal offcuts near work areas. The bucket is equipped with an anti-tipping and anti-sliding mechanism with a safety chain, a fast and secure fork entry system, and an automatic discharge mechanism that can be operated directly by the forklift driver. The high-load capacity polyurethane wheels allow the containers to be moved manually on flat surfaces in a silent manner.

As a standard feature, all BB buckets are equipped with a bottom drain plug for the possible discharge of liquids. Upon request, they can be supplied with a watertight decantation tank.

All our buckets are built and tested in accordance with UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204 standards and are supplied with a dedicated metal label, a certificate of conformity, and an operation and maintenance manual. In addition, all our products are covered by a one-year warranty in compliance with the European Directive.

Application sectors

 Industry