


## DATA SHEET - FIXED LIFTING BEAM



| Code         | Capacity (kg) | Weight (kg) | Dimensions (mm) |     |      |
|--------------|---------------|-------------|-----------------|-----|------|
|              |               |             | A               | B   | C    |
| BIL-1/1000TR | 1000          | 14          | 110             | 60  | 1000 |
| BIL-1/2000TR | 1000          | 40          | 110             | 60  | 2000 |
| BIL-1/3000   | 1000          | 101         | 110             | 60  | 3000 |
| BIL-1/4000   | 1000          | 135         | 110             | 60  | 4000 |
| BIL-2/1000TR | 2000          | 28          | 135             | 75  | 1000 |
| BIL-2/2000TR | 2000          | 72          | 135             | 75  | 2000 |
| BIL-2/3000   | 2000          | 115         | 135             | 75  | 3000 |
| BIL-2/4000   | 2000          | 185         | 135             | 75  | 4000 |
| BIL-3/1000   | 3000          | 40          | 160             | 90  | 1000 |
| BIL-3/2000   | 3000          | 96          | 160             | 90  | 2000 |
| BIL-3/3000   | 3000          | 145         | 160             | 90  | 2000 |
| BIL-3/4000   | 3000          | 225         | 160             | 90  | 4000 |
| BIL-4/1000   | 4000          | 45          | 180             | 100 | 1000 |
| BIL-4/2000   | 4000          | 110         | 180             | 100 | 2000 |
| BIL-4/3000   | 4000          | 150         | 180             | 100 | 3000 |

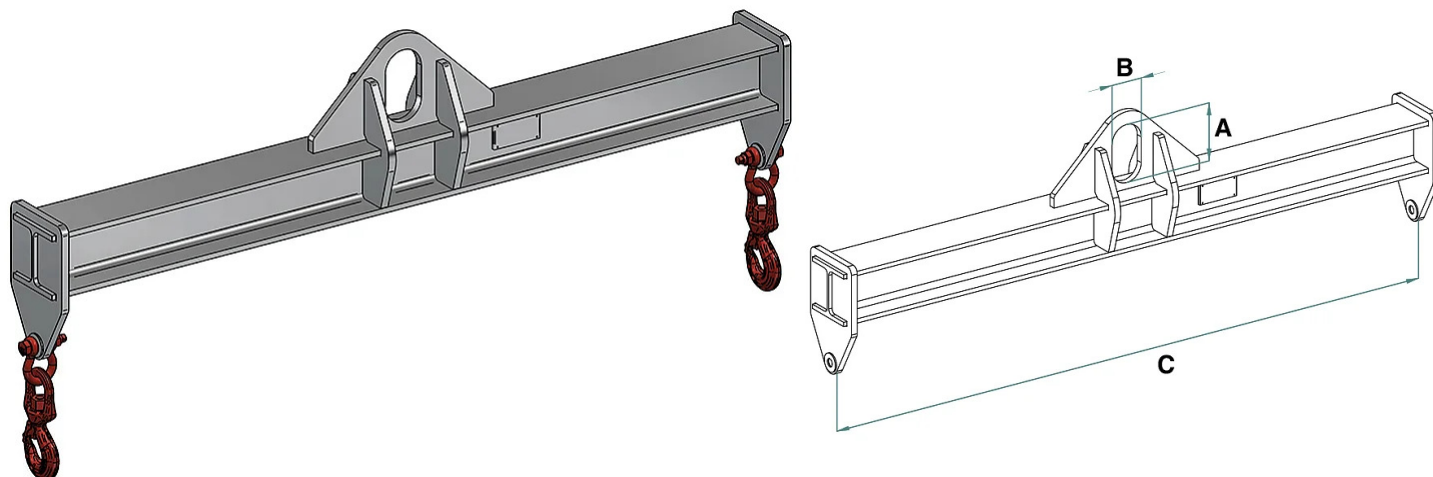

**DATA SHEET - FIXED LIFTING BEAM**

| Code       | Capacity (kg) | Weight (kg) | Dimensions (mm) |     |      |
|------------|---------------|-------------|-----------------|-----|------|
|            |               |             | A               | B   | C    |
| BIL-4/4000 | 4000          | 230         | 180             | 100 | 4000 |



## DATA SHEET - FIXED LIFTING BEAM

---

### Lifting beams



## Fixed lifting beam

### Fixed lifting beam with lower lifting points

Lifting beams with two or more lower attachment points. The connection of the load bar to the lifting device is made through a single central attachment point, consisting of a specially sized suspension loop based on the capacity. Upon request, we offer the possibility to customize the solution with two or more upper attachment points, in order to ensure better load balancing during lifting operations. All equipment is CE certified and supplied complete with user and maintenance manual. Upon request, we can provide a calculation report signed by a qualified technician.

### Application sectors

 Lifting