
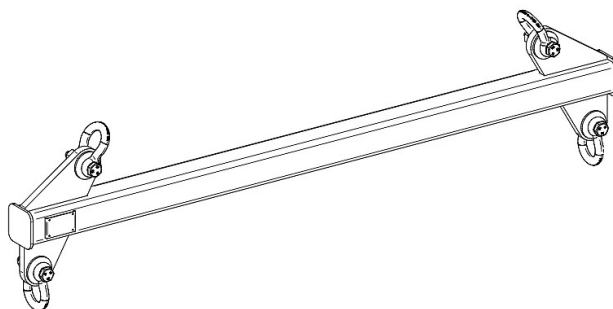


## DATA SHEET - SPREADER BAR

---

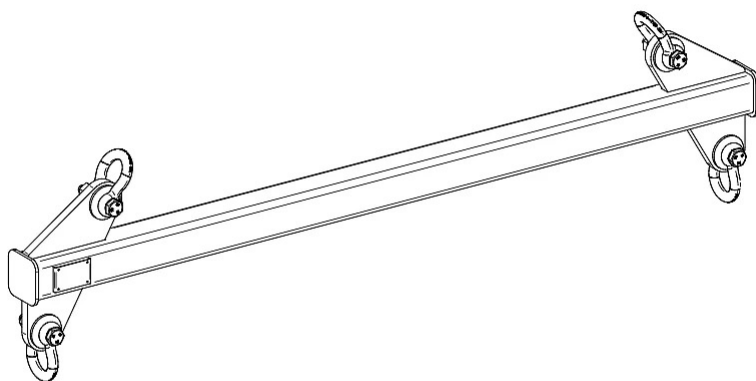

Code
ESB

## DATA SHEET - SPREADER BAR

---

Lifting beams



## Spreader bar

### Fixed spreader bar

These spreader bars are designed with upper attachments positioned at the ends, corresponding to the lower attachments. It is recommended to use chains with a length that creates an internal angle of at least 30 degrees. Built with high-strength steel tubing, the spreader bars are designed to ensure even distribution of the load weight during lifting operations, minimizing tilt. This helps maintain balance and stability, reducing the risk of accidents. All equipment is CE certified and supplied complete with an instruction and maintenance manual. Upon request, we can provide a calculation report signed by a qualified technician.

### Application sectors

 Lifting