


## DATA SHEET - NOT ADJUSTABLE SELF BALANCING CRANE FORK

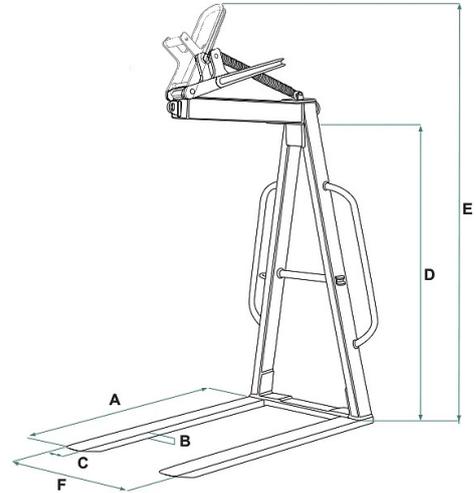

Code	Capacity (kg)	Weight (kg)	Dimensions (mm)					
			A	B	C	D	E	F
MBL-A15H	1500	120	1000	30	90	1750	2500	700
MBL-A20H	2000	145	1000	35	100	1750	2500	700
MBL-A25H	2500	175	1000	40	90	1750	2500	700
MBL-A30H	3000	205	1000	35	120	1750	2500	700

**DATA SHEET - NOT ADJUSTABLE SELF BALANCING CRANE FORK****Crane forks****Not adjustable self balancing crane fork****Fixed crane fork with spring balancing**

The non-adjustable crane fork with spring balancing is designed to provide an efficient lifting solution without the need for width or height adjustments. The automatic spring balancing ensures an even weight distribution during lifting operations. This crane fork is particularly suited for situations where a fixed and stable configuration is required, without the need to adapt to loads of varying sizes. With a useful lifting height of 1750 mm, this crane fork offers greater versatility in terms of lifting height, making it a recommended model for construction cranes with limited tip load capacity. All our crane forks are built and tested according to UNI EN 13155, UNI EN ISO 12100, UNI EN 13854, ISO 8686, and UNI EN 10204 standards and are issued with the appropriate metal ID plate, certificate of conformity, and user and maintenance manual. All our products are covered by a one-year warranty (European Directive).

**Application sectors** Construction  Lifting