


DATA SHEET - HYDRAULIC FORKLIFT TIPPING SKIP

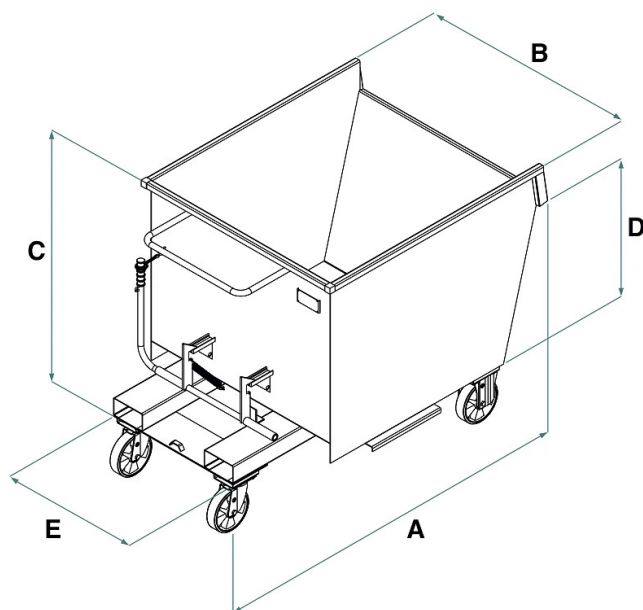

Code	Capacity (kg)	Capacity (L)	Weight (kg)	Dimensions (mm)				
				A	B	C	D	E
BB-30I	600	300	100	1345	860	982	555	585
BB-40I	600	400	110	1348	860	990	749	580
BB-50I	1000	500	120	1480	980	925	835	660
BB-80I	1350	800	175	1515	1110	1075	975	700
BB-99I	1500	1000	210	1640	1110	1195	1045	700
BB-135I	1500	1350	220	1610	1345	1195	1045	800
BB-160I	1500	1600	240	1610	1600	1195	1045	800
BB-200I	1500	2000	275	1620	2100	1195	1148	800

DATA SHEET - HYDRAULIC FORKLIFT TIPPING SKIP

Warehousing logistics



Hydraulic forklift tipping skip

Tipping skip with forklift pockets, wheels and hydraulic piston

The BB-I model represents the optimal solution for easy and safe collection, transport, and unloading of industrial waste, chips, scraps, and scrap in work areas. The bucket is equipped with an anti-tipping and sliding mechanism with a safety chain, a quick and secure fork mounting system, and an automatic unloading mechanism operable directly by the operator seated on the forklift. The high load capacity polyurethane wheels allow the containers to be moved manually on flat surfaces quietly. Upon request, the buckets can be equipped with a sealed decanting tank and a drain plug for liquids. Each BB-I model is equipped with a hydraulic piston designed for increased safety, ensuring a long life for the forklift uprights and the containers themselves, allowing for a gradual and progressive tipping without violent rebounds. All our buckets are built and tested in compliance with UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204 standards. They are supplied with the appropriate metal ID plate, a conformity certificate, and a user and maintenance manual. Additionally, all our products are covered by a one-year warranty in accordance with the European Directive.

Application sectors

 **Industry**