


## DATA SHEET - CONICAL CONCRETE BUCKET WITH BOTTOM DISCHARGE

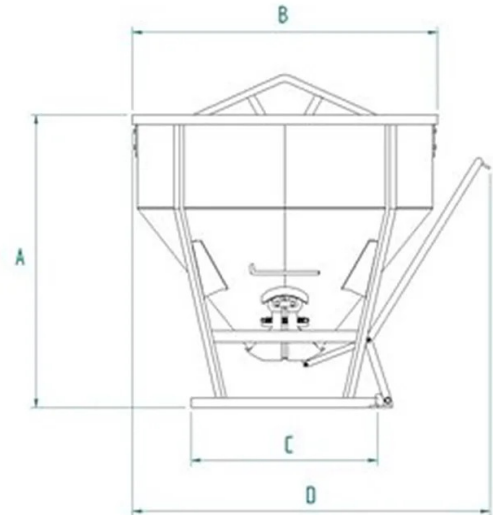

Code	Capacity (kg)	Capacity (L)	Weight (kg)	Dimensions (mm)			
				A	B	C	D
C-15	390	150	50	540	920	750	1050
C-20	520	200	55	620	920	750	1050
C-25	650	250	60	700	920	750	1050
C-30	780	300	65	780	920	750	1050
C-35	910	350	70	860	920	750	1050
C-40	1040	400	75	890	1050	880	1200
C-50	1300	500	85	950	1050	880	1200
C-60	1560	600	90	1070	1050	880	1200
C-80	2080	800	135	1120	1250	750	1450
C-99	2600	1000	150	1300	1250	750	1450
C-150	3900	1500	230	1800	1250	750	1450

## DATA SHEET - CONICAL CONCRETE BUCKET WITH BOTTOM DISCHARGE

---

Concrete buckets




### Conical concrete bucket with bottom discharge

#### Conical concrete bucket with central discharge and lever opening

Designed to ensure practicality and operational efficiency, the Model C stands out for its user-friendly simplicity. Its distinctive feature of having a lowered edge height simplifies the filling process with the concrete mixer. The lever-operated bi-valve opening ensures smooth and controlled dosing, guaranteeing high-quality work and safety in any setting. Model C is available in a wide range of sizes and capacities, offering flexibility and adaptability to the specific needs of your project. You can further customize the bucket by choosing between the galvanized version or one with a side discharge channel, for precise orientation of the pour. Each bucket is built and tested according to stringent standards UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204. Each product is accompanied by a metal ID plate, a certificate of conformity, and an operation and maintenance manual to ensure maximum quality and safety. Choose our Model C conical bucket for efficient and reliable concrete solutions, covered by a one-year warranty in compliance with the European Directive. Trust our experience for your construction and reinforced concrete projects.

#### Application sectors

 Construction