


**DATA SHEET - MANUAL BALANCE CRANE FORK WITH HEIGHT AND FORKS ADJUSTABLE**

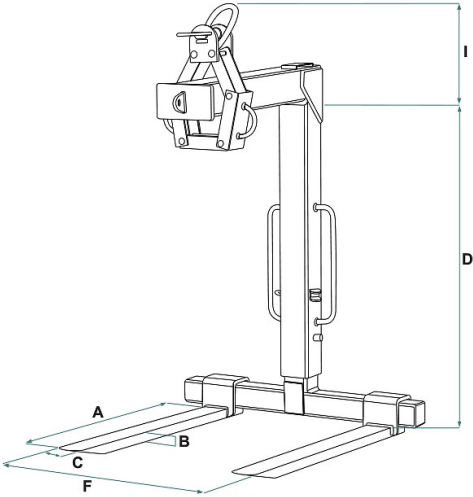

| Code    | Capacity (kg) | Weight (kg) | Dimensions (mm) |    |     |           |     |          |
|---------|---------------|-------------|-----------------|----|-----|-----------|-----|----------|
|         |               |             | A               | B  | C   | D         | E   | F        |
| MBR-15M | 1500          | 165         | 1000            | 30 | 90  | 1150-1700 | 600 | 350-1000 |
| MBR-20M | 2000          | 180         | 1000            | 35 | 100 | 1150-1800 | 600 | 350-1000 |
| MBR-25M | 2500          | 225         | 1000            | 40 | 90  | 1150-1800 | 600 | 350-1000 |
| MBR-30M | 3000          | 255         | 1000            | 35 | 120 | 1150-1800 | 600 | 350-1000 |

## DATA SHEET - MANUAL BALANCE CRANE FORK WITH HEIGHT AND FORKS ADJUSTABLE

---

### Crane forks



## Manual balance crane fork with height and forks adjustable

### Crane fork with manual balancing

The height-adjustable telescopic crane fork with manual balancing and adjustable tines is designed for efficient load lifting on trucks due to its limited height clearance. With an adjustable telescopic system, adaptable tines, and manual balancing, it offers flexibility, precise control, and ease of use. Made with robust materials, it ensures durability and compliance with safety regulations. All our crane forks are built and tested according to UNI EN 13155, UNI EN ISO 12100, UNI EN 13854, ISO 8686, and UNI EN 10204 standards and are issued with the appropriate metal ID plate, certificate of conformity, and user and maintenance manual. All our products are covered by a one-year warranty (European Directive).

### Application sectors

 Construction  Lifting