


DATA SHEET - SPREADER BAR



Code	Capacity (kg)	C
ESB-1/1000	1000	1000
ESB-1/2000	1000	2000
ESB-1/3000	1000	3000
ESB-1/4000	1000	4000
ESB-2/1000	2000	1000
ESB-2/2000	2000	2000
ESB-2/3000	2000	3000
ESB-2/4000	2000	4000
ESB-3/1000	3000	1000
ESB-3/2000	3000	2000
ESB-3/3000	3000	3000
ESB-3/4000	3000	4000
ESB-4/1000	4000	1000
ESB-4/2000	4000	2000
ESB-4/3000	4000	3000

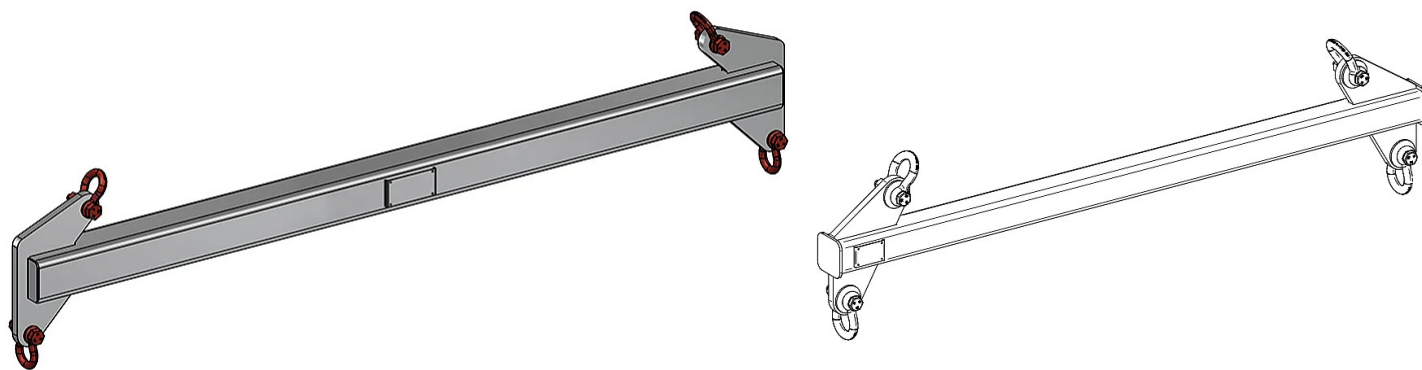

DATA SHEET - SPREADER BAR

Code	Capacity (kg)	C
ESB-4/4000	4000	4000



DATA SHEET - SPREADER BAR

Lifting beams



Spreader bar

Fixed spreader bar

These spreader bars are designed with upper attachments positioned at the ends, corresponding to the lower attachments. It is recommended to use chains with a length that creates an internal angle of at least 30 degrees. Built with high-strength steel tubing, the spreader bars are designed to ensure even distribution of the load weight during lifting operations, minimizing tilt. This helps maintain balance and stability, reducing the risk of accidents. All equipment is CE certified and supplied complete with an instruction and maintenance manual. Upon request, we can provide a calculation report signed by a qualified technician.

Application sectors

 **Lifting**