


DATA SHEET - CHAIN SLINGS



Code	Capacity (kg)	Diameter (mm)	No. of legs	Dimensions (mm)
				A
C10.1.500ZSL	3150	10	1	500
C10.1.1000ZSL	3150	10	1	1000
C13.1.1000ZSL	5300	13	1	1000
C16.1.1000NSL	8000	16	1	1000
C20.1.1000NSL	12500	20	1	1000
C07.2.2000ZSL	2100	7	2	2000
C08.2.2000ZSL	2800	8	2	2000
C10.2.2000ZSL	4400	10	2	2000
C13.2.2000ZSL	7500	13	2	2000
C07.3.2000ZSL	3150	7	3	2000
C08.3.2000ZSL	4200	8	3	2000
C10.3.2000ZSL	6600	10	3	2000
C07.4.1500ZSL	3150	7	4	1500
C07.4.3000ZSL	3150	7	4	3000
C10.4.2000ZSL	6700	10	4	2000

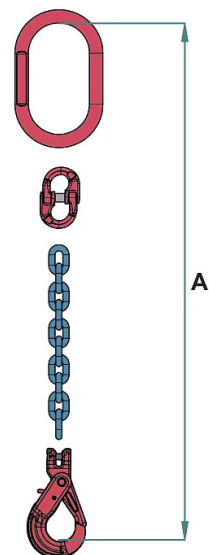

DATA SHEET - CHAIN SLINGS

Code	Capacity (kg)	Diameter (mm)	No. of legs	Dimensions (mm)
				A
C13.4.2000ZSL	11200	13	4	2000



DATA SHEET - CHAIN SLINGS

Chain slings and webbing slings



Chain slings

Assortment of chain slings

Explore our wide range of zinc-plated chain slings, designed in flexible configurations with options for **1, 2, 3, and 4 arms**, available in various lengths and load capacities. This versatile selection is designed to meet a broad range of industrial needs and applications, ensuring flexibility and adaptability in every operational context.

Our chain sling are constructed with a **safety factor of 1:4**, ensuring excellent strength and durability characteristics. These devices provide secure and reliable suspension for heavy and varied loads. Our range includes models with multiple arms, different types of hooks, and shorteners, ideal for lifting loads with multiple attachment points or unbalanced centers of gravity.

All our chain slings strictly comply with international standards, including EN 1492-1, EN 1492-2, Decree 459 of 06-09-96, CEE Machine Directive 91/368, and ISO 4878-81, ensuring the highest safety and quality standards.

For specific needs or customization requests, please feel free to contact us. Our team is available to provide assistance and tailor-made solutions that perfectly meet your requirements.

Application sectors

 Lifting