


DATA SHEET - LAYDOWN CONCRETE COLUMN SKIP WITH RUBBER HOSE AND GEARED OPENING

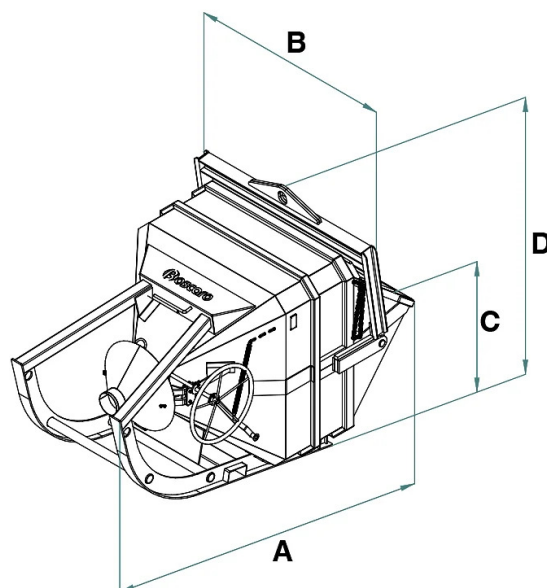

Code	Capacity (kg)	Capacity (L)	Weight (kg)	Dimensions (mm)			
				A	B	C	D
BC-40V	1040	400	310	1918	1292	735	1422
BC-50V	1300	500	325	2016	1292	753	1440
BC-60V	1560	600	335	2115	1292	771	1458
BC-80V	2080	800	365	2345	1550	931	1790
BC-99V	2600	1000	455	2442	1550	931	1790
BC-125V	3250	1250	460	2590	1550	1147	1951
BC-150V	3900	1500	655	2737	1765	1147	1951
BC-175V	4550	1750		2830	1765	1183	1985
BC-200V	5200	2000	755	2940	1765	1183	1985
BC-250V	6500	2500	980	3135	1985	1343	2186
BC-300V	7800	3000	1390	3327	1985	1378	2221

DATA SHEET - LAYDOWN CONCRETE COLUMN SKIP WITH RUBBER HOSE AND GEARED OPENING

Concrete buckets



Laydown concrete column skip with rubber hose and geared opening

Laydown concrete bucket with rubber hose and wheel opening

The concrete bucket, with a handwheel-operated opening and rubber hose, represents the ideal choice for executing precise and reliable pours on the most demanding construction sites and for intensive use. Its design, tailored to the needs of the most challenging sites, makes it indispensable for pouring large quantities of concrete with extreme precision into formwork, pillars, or slabs, thereby avoiding potential structural issues from casting errors. The bucket is equipped with a bivalve closure operated by a handwheel positioned laterally. A spring allows for automatic closure of the discharge, while a rope allows the bucket to be opened even at height. The two-meter-long rubber hose, with a diameter of 200 mm, ensures a controlled and precise flow of concrete during pouring. A unique feature of these buckets is the horizontal ground loading method, which makes the bucket, even if of large capacity, very low at the edge, allowing the concrete mixer to fill it without any impediment. Once filled, the bucket is safely lifted by the crane through a bale arm, automatically repositioning itself vertically and becoming ready for new use, thus ensuring high efficiency and ease of use on-site. All our buckets are built and tested in accordance with the strict standards UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204. Each product comes with a metal ID plate, a certificate of conformity, and a user and maintenance manual to ensure proper use over time. Additionally, all our products are covered by a one-year warranty, in compliance with the European Directive.

Application sectors

 Construction